

WAGO Power Supplies and WAGO System Modules



NEW
WAGO POWER SUPPLIES

Pro2

Contents

Power Supplies

WAGO Power Supplies "Pro 2"	6
WAGO Power Supplies "Classic"	12
WAGO Power Supplies "Eco"	16
WAGO Power Supplies "Compact"	20
WAGO DC/DC Converters	24

System Modules

WAGO Uninterruptible Power Supplies (UPS)	28
WAGO Capacitive Buffer Modules	32
WAGO Redundancy Modules	34
WAGO Electronic Circuit Breakers (ECBs)	36
Solutions	42
Communication	44
Glossary	46
Accessories	47

WAGO POWER SUPPLIES

PRO 2

Applications with high output requirements call for professional power supplies capable of reliably handling power peaks. WAGO's Pro 2 Power Supplies are ideally suited to such installations.



CLASSIC

WAGO's robust Classic Power Supplies with integrated TopBoost (optional) feature a wide input voltage range and an extensive list of international approvals, allowing them to be used in a wide variety of applications.



ECO

Many basic applications only require 24 VDC. This is where WAGO's Eco Power Supplies excel as an economical solution.



COMPACT

WAGO's high-performance Compact Power Supplies in DIN-rail-mount housings are available with output voltages of 5, 12, 18 and 24 VDC, as well as nominal output currents up to 6.5 A.



WAGO SYSTEM MODULES



UPS

Consisting of a 24 V UPS charger and controller with one or more connected battery modules, WAGO's Uninterruptible Power Supply reliably powers an application for several hours.

CAPACITIVE BUFFER MODULES

In addition to reliably ensuring trouble-free machine and system operation – even through brief power failures – WAGO's Capacitive Buffer Modules offer the power reserves that may be required when starting heavy motors or triggering a fuse.



REDUNDANCY MODULES

WAGO's Redundancy Modules are ideal for reliably increasing power supply availability. These modules decouple two parallel-connected power supplies and are suitable for applications where an electrical load must be reliably supplied – even in the event of a power supply failure.

ELECTRONIC CIRCUIT BREAKERS

WAGO's compact ECBs provide reliable protection against overload and short circuit. Their slim design offers high channel density, saving valuable control cabinet space.



WAGO POWER SUPPLIES PRO 2

The New Heart
of Your Control Cabinet




Class-Leading Product Features of WAGO's Pro 2 Power Supplies:

- Intelligent power management that supplies 150% power for 5 s, and up to 600% output power for 15 ms in the event of short circuits
- High level of resistance to adverse environmental influences: Heat, cold and elevation have little impact on performance
- Pioneering communication capabilities that keep you informed about all important status information and data – ready for Industry 4.0
- Easy planning and installation thanks to compact dimensions and 2D/3D data in the most important formats

Power supplies are the heart of a control cabinet's DC power supply. Therefore, they must meet particularly high requirements for reliability, efficiency and installation size. However, increasing networking and digitization also require new features, such as configuration options for adapting to the corresponding application and providing service and operating data, in order to implement digital twin over many years of operation.

Our answer to these stricter requirements is the WAGO Power Supply Pro 2 – the heart of the control cabinet, which takes the challenges of today and tomorrow and turns them into concrete possibilities.

1-Phase; Output: 24 VDC

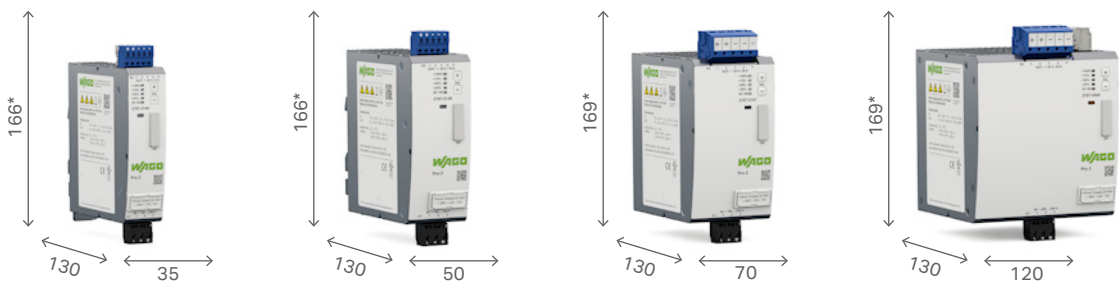

2787-2144
5 A

2787-2146
10 A

2787-2147
20 A

2787-2448
40 A


3-Phase; Output: 24 VDC



2787-2347
20 A

2787-2348
40 A

IO-Link Communication Module



2789-9080

*with connectors, 130 mm without connectors

Communication

WAGO's pluggable IO-Link Communication Module allows continuous fieldbus communication, provides data such as the actual output current and voltage and can also be configured or put in standby mode remotely.

Ready for digitization thanks to modular fieldbus communication

Continuous overview of all the data and values of your system's power supply

Greater system uptime thanks to early warning and predictive maintenance




Configuration

WAGO's new Interface Configuration Software offers both local/remote configuration and parameter setting, allowing the power supplies to be quickly and easily tailored to all system requirements. The configuration function can be used to configure the power supply as an ECB. In case of an overcurrent, the output can be reactivated by the digital input – saving space and money for external fuses, while protecting downstream devices.

The power supply can be customized to **virtually any application** via **configuration options**.

The configurable circuit breaker functionality **lowers costs and space requirements** while **increasing safety**.

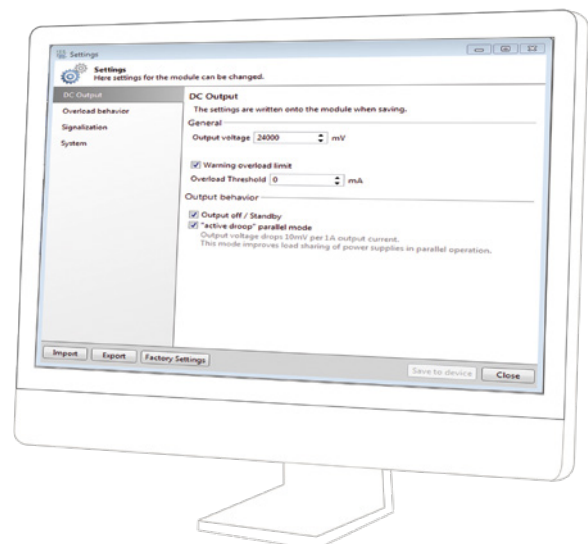

Load Management

Rapidly switching capacitive loads and high start-up currents are no problem, thanks to 150% output power (PowerBoost) for 5 seconds. Output current up to 600% for 15 ms provides reserves for rapid, reliable tripping of miniature circuit breakers. The ability to allow a specified output current to be exceeded for a configurable amount of time allows the Pro 2 Power Supply to work like a single-channel ECB.

Fast and reliable tripping of miniature circuit breakers **thanks to temporary output currents** of up to 600%

Quick charging of capacitors and **fast switching** of contactors thanks to output currents of up to 150% for 5 seconds

Use WAGO's Pro 2 Power Supply as an **ECB**



600%

150% Temporary PowerBoost in the event of load peaks

100% Normal power consumption

75%

50%

25%

Efficiency

Up to 96% efficiency in a wide load range is the key to energy cost savings, reduced power losses and lower demand for control cabinet cooling. The CO₂ footprint is also dramatically reduced. WAGO's Pro 2 Power Supply can be permanently connected to the PLC via the communication module or a digital signal, enabling switch off of the power supply output via a signal and use the standby mode for energy savings.

Lower CO₂ emissions/energy costs with up to 96% efficiency

Energy cost savings via standby mode activation



96%

Robust Design

WAGO's Pro 2 Power Supplies can be started and operated from -40°C to $+70^{\circ}\text{C}$, allowing significant cost savings by reducing the need for control cabinet air conditioning. Featuring low derating capability above 60°C , the Pro 2 units deliver nearly full output power at 70°C . Furthermore, their highly robust design provides reliable operation in high-vibration and shock-prone applications. The power supplies can be operated in altitudes up to 5000 m, requiring no derating below 2000 m ASL.

A wide temperature range opens up many application possibilities.

The Pro 2 units easily withstand **shocks, vibrations and the harsh conditions of high-altitude operation.**

Overvoltage category III up to 2000 m provides **greater operational reliability.**



$-40^{\circ}\text{C} \dots +70^{\circ}\text{C}$

Design

WAGO's Pro 2 Power Supply requires less space in the control cabinet and less distance from other components, which helps minimize cooling costs. 2D/3D data is available for the devices via CADENAS PARTcommunity, EPLAN Makros and Smart Designer support. The connectors and clamping units are labeled in accordance with EN 81346-2 for sophisticated marking of individual connection points.

Compact design and high efficiency reduce space requirements and **improve control cabinet cooling.**

The digital twin simplifies E-CAD implementation while **reducing time and costs.**

Device and connection points are labeled in accordance with **EN 81346-2.**

ePLAN[®]
data portal

WSCAD
ELECTRICAL ENGINEERING

Reliability

MTBF > 1,000,000 hours and long service lives of the components used mean lower maintenance costs compared to other power supplies. Furthermore, WAGO's Pro 2 Power Supply offers higher output currents at 70°C, so downsizing the power supply saves money and space in high-temperature applications. Because they fulfill the requirements of overvoltage category III, the devices can also withstand transients of 4 kV and above.

The MTBF value and component service lives promise an **extensive service life** for the WAGO Power Supply Pro 2.

Derating is first required for temperatures above 60°C, allowing **high output power capability even in high-temperature applications**.

Active power factor correction and overvoltage category III



MTBF:
1,000,000 h

Installation

WAGO's spring pressure connection technology guarantees highly secure, maintenance-free and fast connections, significantly reducing costs. WAGO's pluggable connectors enable both pre-assembled wiring and fast installation, providing additional cost reductions. The front-panel interface allows fast and easy parameterization, while an LED bar chart intuitively indicates the current load. Marking in accordance with EN 81346-2 for clear connection point identification prevents wiring errors.

Push-in CAGE CLAMP® Connectors **save both wiring and installation time**.

Configuration via interface software offers **greater flexibility and clarity during installation**.

Both LED bar chart and device/connection point labeling **simplify system commissioning**.



WAGO POWER SUPPLIES CLASSIC

Robust Power Supplies –
with Integrated TopBoost
(Optional)



Communicative

- Green LED indicates output voltage availability
- Remote monitoring via DC OK signal or potential-free DC OK contact
- Easy commissioning and maintenance
- Quickly provides system information or machine status



Integrated TopBoost*

- Multiplies the nominal current
- Fast and reliable triggering of the secondary-side fusing via circuit breakers or melting fuses in the event of a short circuit and overload

*only for 787-1622 ... -1628, -1631 ... -1638, -1640 ... -1644




Device Marking

- Marking field for fast and securely attached device identification
- Supports WAGO's WMB Multi marking system (5 mm pin spacing)
- Supports WAGO's marking strips (11 mm wide)




High Load-Carrying Capacity

- Constant current characteristic under overload conditions
- 110% output current with a lowered output voltage – even during a short circuit
- Even high capacitive loads can be reliably started

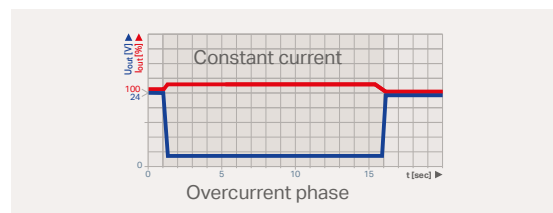

Slim Design


- Enclosure width has been reduced by up to 45% compared to previous Classic Power Supplies
- Saves valuable cabinet space

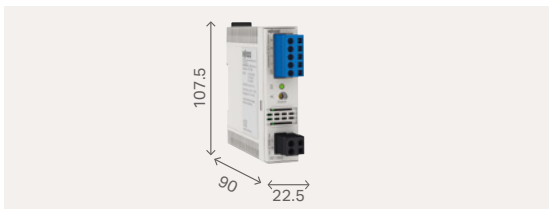

WAGO POWER SUPPLIES CLASSIC

Robust Power Supplies – with Integrated TopBoost (Optional)

1-Phase; Input: 85 ... 264 VAC
24 VDC

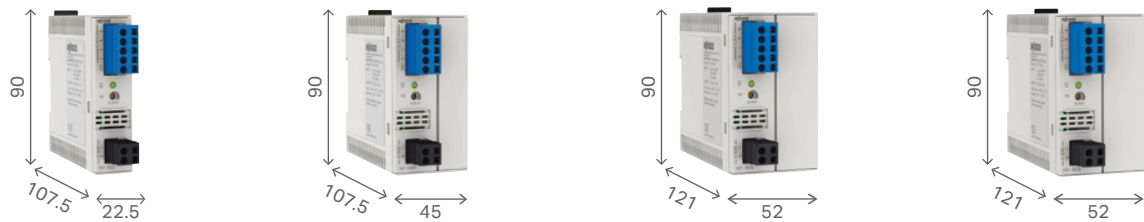


787-1602 1 A	787-1606 2 A	787-1616/0000-1000 3.8 A NEC Cl. 2	787-1616* 4 A
-----------------	-----------------	---------------------------------------	------------------

1-Phase; Input: 85 ... 264 VAC
24 VDC



787-1622 5 A	787-1632* 10 A	787-1634* 20 A
-----------------	-------------------	-------------------

1-Phase; Input: 85 ... 264 VAC
12 VDC

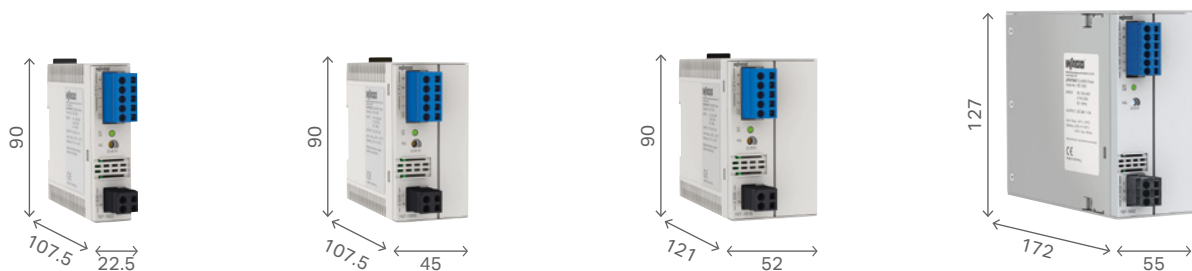

787-1601 2 A	787-1611 4 A	787-1621 7 A	787-1631 15 A
-----------------	-----------------	-----------------	------------------

*.../0000-0070 is available with optional protective coating


**1-Phase; Input: 85 ... 264 VAC
48 VDC**



787-1623
2 A



787-1633
5 A



787-1635*
10 A

**2-Phase; Input: 180 ... 550 VAC
24 VDC**




787-1628
5 A




787-1638
10 A


**3-Phase; Input: 320 ... 575 VAC
24 VDC**



787-1640
10 A



787-1642
20 A

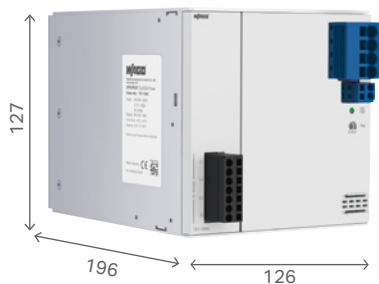

787-1644
40 A

WAGO POWER SUPPLIES ECO


Economical Power Supplies
for Standard Applications



High Load-Carrying Capacity

- Overload warning from 1.15 times the nominal output current*
- Overload of up to 1.4 times the nominal current with a lowered output voltage (constant power)*
- Output shutdown in case of a low-resistance short circuit; also includes automatic restart

*except for 787-17xx

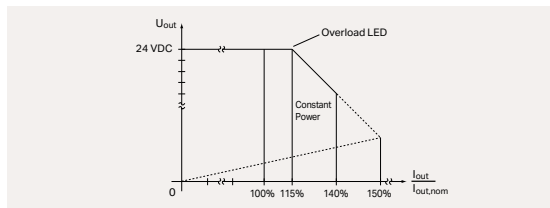


Status Monitoring

- Potential-isolated NO contact signal, via bounce-free optocoupler* or PhotoMOS**
- Indicates whether an output voltage or an overload is present
- Ideal for remote monitoring

*only for 787-734 ... -740


**only for 787-2742, -2744

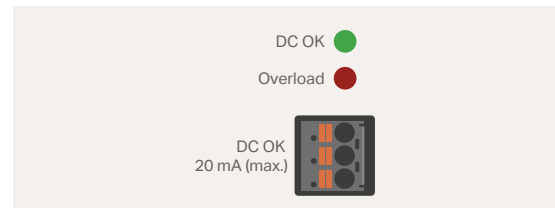

Fast Wiring

- Comfortable, tool-free wiring thanks to lever-actuated terminal strips*
- Integrated test slot simplifies testing by eliminating conductor removal

*only for 787-734 ... -740, -2742, -2744

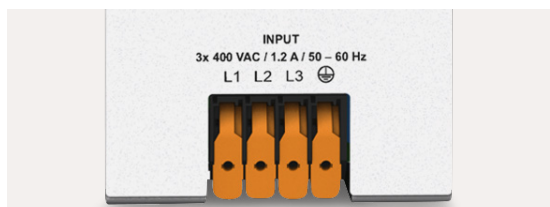

Versatile Mounting Options


- Flexible mounting via DIN-rail adapter*
- Flexible installation via screw-mount clips*

*only for 787-17xx



Highly Economical


- Triple the savings thanks to low purchase costs, easy installation and maintenance-free operation
- Budget-friendly for basic applications

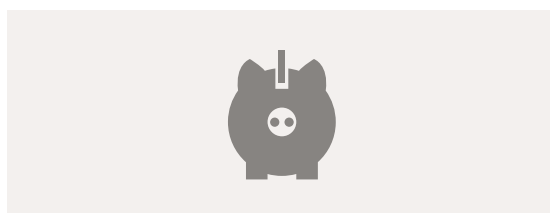

WAGO POWER SUPPLIES ECO


Economical Power Supplies for Standard Applications

1-Phase; Input: 85 ... 264 VAC
24 VDC

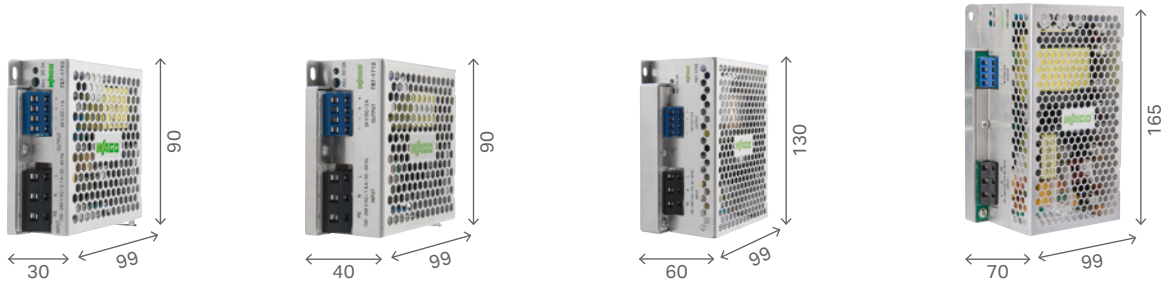


787-1702	787-1712	787-1722	787-1732
1.25 A	2.5 A	5 A	10 A

1-Phase; Input: 85 ... 264 VAC
24 VDC

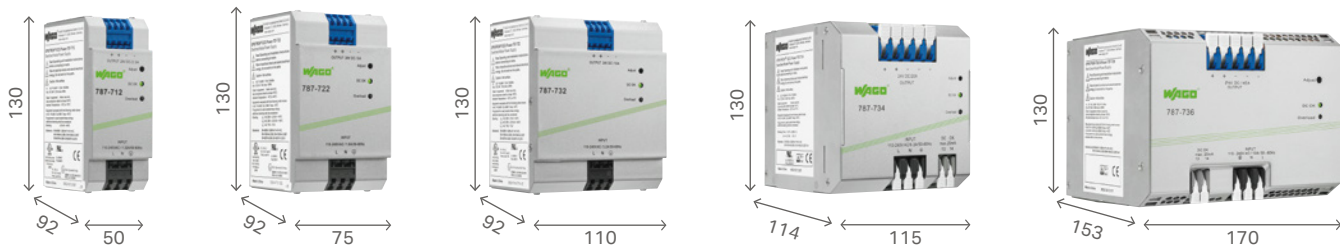



787-712	787-722	787-732	787-734	787-736
2.5 A	5 A	10 A	20 A	40 A

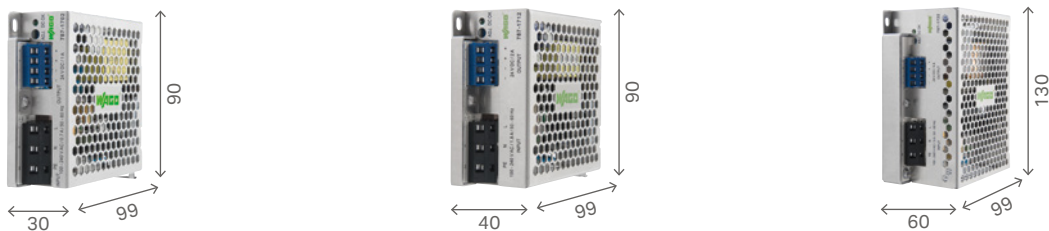1-Phase; Input: 85 ... 264 VAC
12 VDC



787-1701	787-1711	787-1721
2 A	4 A	8 A

3-Phase; Input: 360 ... 460 VAC
24 VDC

 <p>Dimensions: 130 (height), 92 (width), 50 (depth)</p>	 <p>Dimensions: 130 (height), 130 (width), 65 (depth)</p>
787-738 6.25 A	787-740 10 A

3-Phase; Input 340 ... 575 VAC
24 VDC

 <p>Dimensions: 130 (height), 170 (width), 80 (depth)</p>	 <p>Dimensions: 130 (height), 170 (width), 140 (depth)</p>
787-2742 20 A	787-2744 40 A

WAGO POWER SUPPLIES COMPACT


Compact, High-Performance
Power Supplies



Easy to Connect

- CAGE CLAMP® Connection Technology – vibration-proof, fast, maintenance-free
- Pre-assembly via pluggable *picoMAX*® Connection Technology*

*only for 787-11xx, 787-12xx

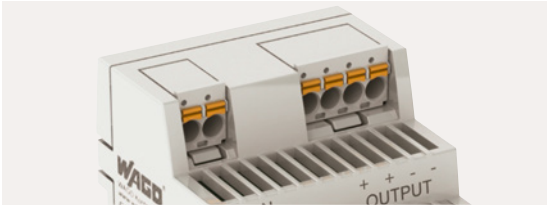

DIN-Rail Built-In Installation

- Housing design per EN 43880, for installation in small distribution boards or meter panels



Versatile Mounting Options

- Easy mounting on DIN-rail
- Flexible installation via screw-mount clips also possible*

*only for 787-12xx



Overhead Mounting


- Any type of mounting position is possible at reduced output power
- Units can even be mounted overhead (e.g., in ceiling-mounted distribution boxes)
- Improved cooling due to removable front plate*

*only for 787-1202, -1212



Highly Economical


- Triple the savings thanks to low purchase costs, easy installation and maintenance-free operation
- Budget-friendly for basic applications

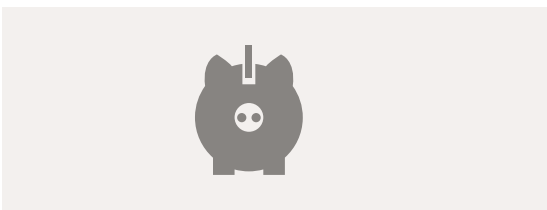


WAGO POWER SUPPLIES COMPACT

Compact, High-Performance Power Supplies


1-Phase; Input: 85 ... 264 VAC
24 VDC (with *picoMAX*®)



787-1102
1.3 A




787-1112
2.5 A




787-1122
4 A


1-Phase; Input: 85 ... 264 VAC
24 VDC



787-1002
1.3 A




787-1012
2.5 A




787-1022
4 A


1-Phase; Input: 90 ... 264 VAC
24 VDC with *picoMAX*®




787-1200
0.5 A



787-1202
1.3 A



787-1212
2.5 A




787-1216
4.2 A


**1-Phase; Input: 85 ... 264 VAC
12 VDC**



787-1001
2 A




787-1011
4 A




787-1021
6.5 A

**1-Phase; Input: 85 ... 264 VAC
18 VDC**




787-1017
2.5 A

**1-Phase; Input: 85 ... 264 VAC
5 VDC**




787-1020
5.5 A

**1-Phase; Input: 90 ... 264 VAC
24 VDC with *picoMAX*®**

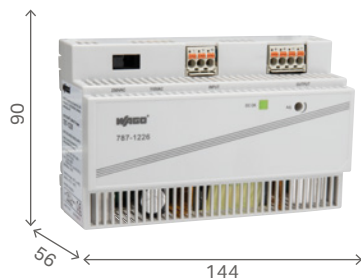


787-1226
6 A

Dependable Power Supply for Specialty Voltages

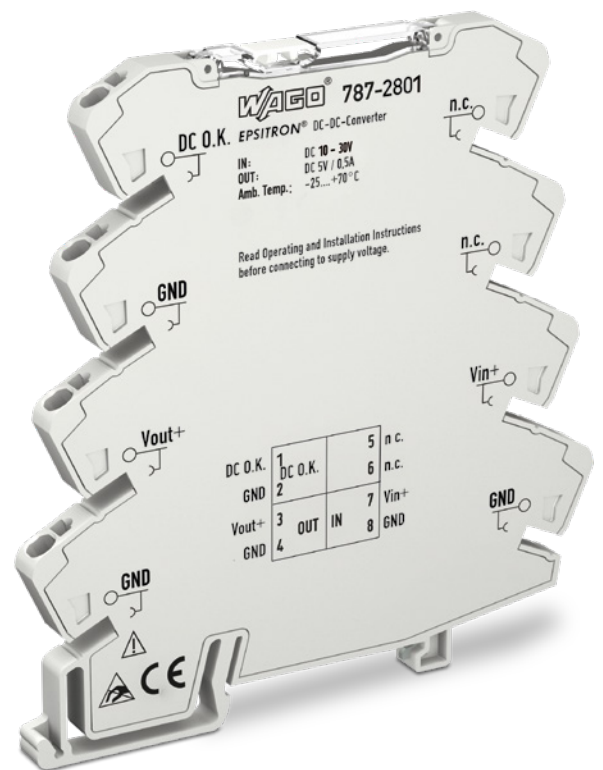

A Device for a Wide Variety of Applications

- Output voltage of the DC/DC Converter (787-2810) set via built-in DIP switch

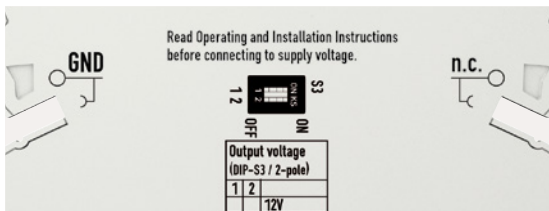

Communicative

- Green LED indicates output voltage availability
- Remote monitoring via DC OK
- Easy commissioning and maintenance



Can Be Commoned with 857/2857 Series

- Full commoning of the supply voltage thanks to shared profile between the 787-28xx DC/DC Converters and the 857/2857 Series Relays and Signal Conditioners



Industry's Most Compact

- "True" 6.0 mm (0.23 inch) width maximizes panel space



Suitable for Railway Applications per EN 50155

- Wide DC input voltage range
- Wide temperature range
- Protective coating


*only 787-1014 & 787-101x/0072-0000



WAGO DC/DC CONVERTERS

Dependable Power Supply for Specialty Voltages


Input: 24 VDC

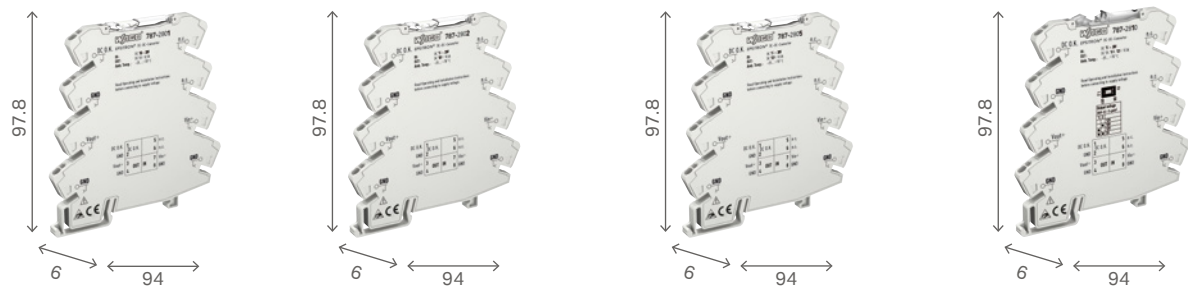

787-2801 5 VDC 0.5 A	787-2802 10 VDC 0.5 A	787-2805 12 VDC 0.5 A	787-2810 5/10/12 VDC, adjustable 0.5 A
----------------------------	-----------------------------	-----------------------------	----------------------------------------------

Input: 24 VDC


Input: 48 VDC

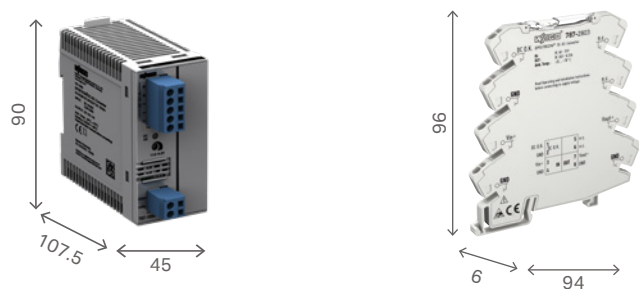

787-1650 12 VDC* 4 A	787-2803 24 VDC 0.5 A
----------------------------	-----------------------------

Input: 72 VDC

Input: 110 VDC

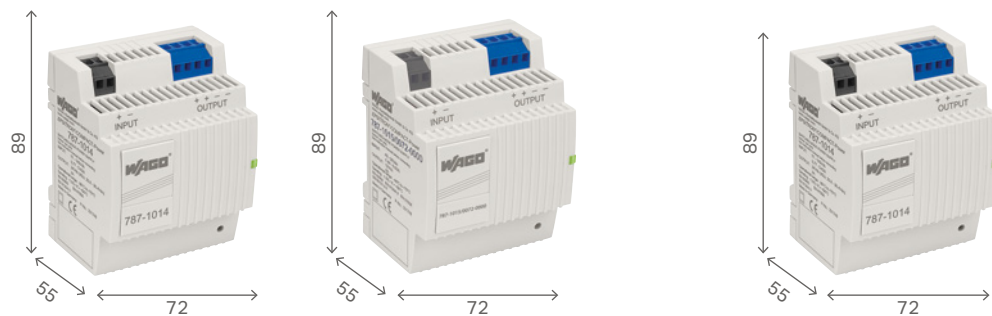

787-1014/0072-0000 27 VDC* 2 A

*electrically isolated output




WAGO UNINTERRUPTIBLE POWER SUPPLIES

Reliable Compensation –
Even for Longer Power Outages




Battery Control Technology

- Allows continuous data exchange between intelligent Battery Modules (787-87x) and a UPS Charger/Controller
- Automatically detects a connected Battery Module (787-87x)
- Maximized battery life via temperature-controlled battery management

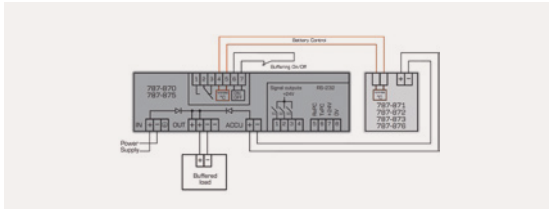

Display with Charge Level Indication


- Indicates actual current and voltage values
- Bar chart displays the charge level of connected batteries
- Integrated fault memory

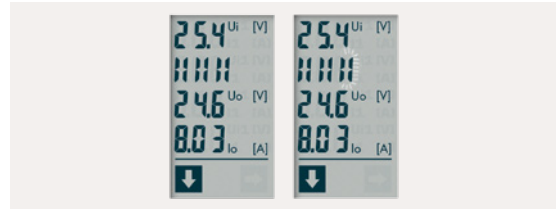

RS-232 Serial Interface


- Free download* of the Configuration and Visualization Software (759-870)
- Free download of function blocks for visualization on standard PLC systems
- Serial Communication Cable (787-890 or -892) available as an accessory

*www.wago.com

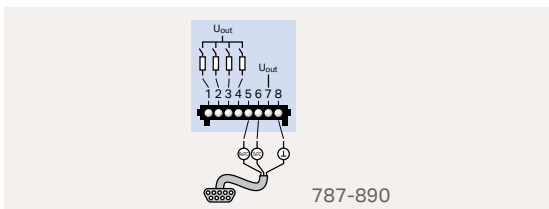


Diagnostics, Monitoring, Configuration

- LEDs display operating status, warnings and errors
- Signal outputs can be processed as a digital signal in a PLC
- Potential-free signal contacts
- Parameter setting via on-unit buttons or rotary switch
- Visualization or configuration via RS-232 serial interface

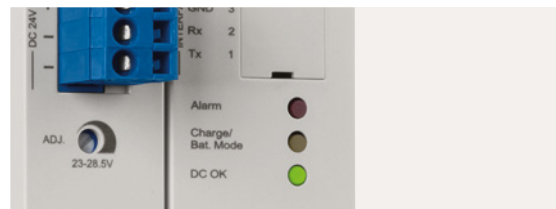


IPC Mode

- Function for the controlled shutdown of controllers and PCs
- Shutdown signal transmitted to controller through UPS
- Adjustable wait time and dead times

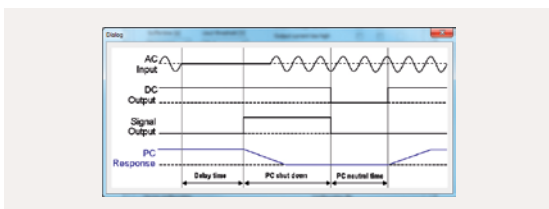

Buffer Time

- Based on battery capacity and discharge current
- Several battery modules available with capacities from 0.8–12 Ah (up to 26 Ah upon request)
- Parallel connection of up to three battery modules of the same type increases buffer time – any lead battery modules can be connected (see pages 42/43)

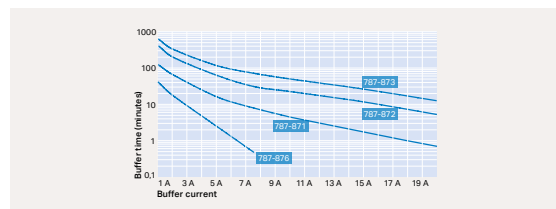

WAGO

UNINTERRUPTIBLE POWER SUPPLIES (UPS)

Robust Power Supplies – with Integrated TopBoost (Optional)


UPS Chargers and Controllers 24 VDC



787-870
10 A




787-875
20 A



787-1675
5 A

Lead-Acid AGM Battery Modules 24 VDC



787-1671
0.8 Ah




787-876
1.2 Ah



787-871
3.2 Ah




787-872
7 Ah




787-873
12 Ah

Pure Lead Battery Modules 24 VDC



787-878/0000-2500*
2.5 Ah




787-878/0001-3000*
13 Ah


*available upon request

SOLUTIONS


Reliable Supply of Automation Systems – Even During Power Failure

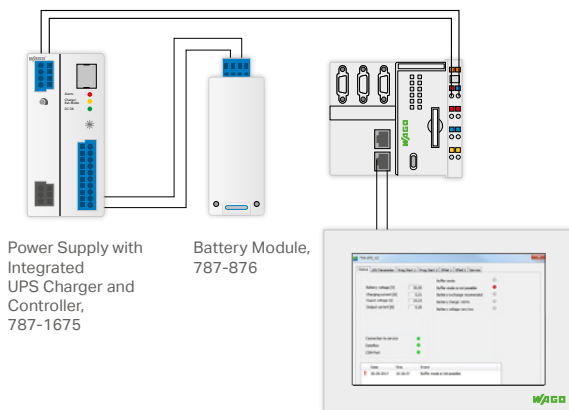


Controlled System Shutdown via UPS Shutdown Function

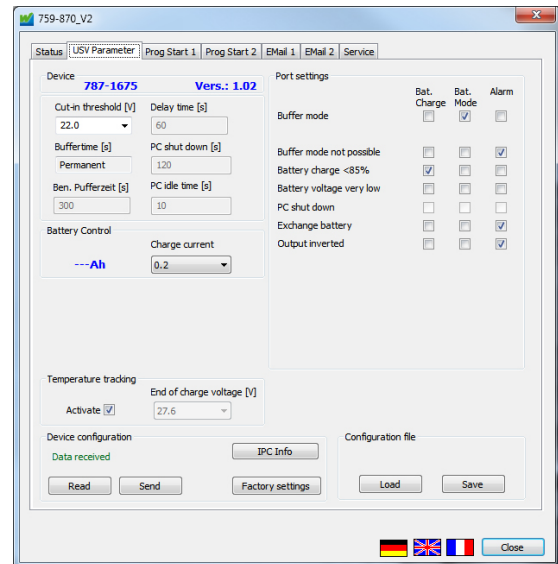

Buffer Time vs. Load Current

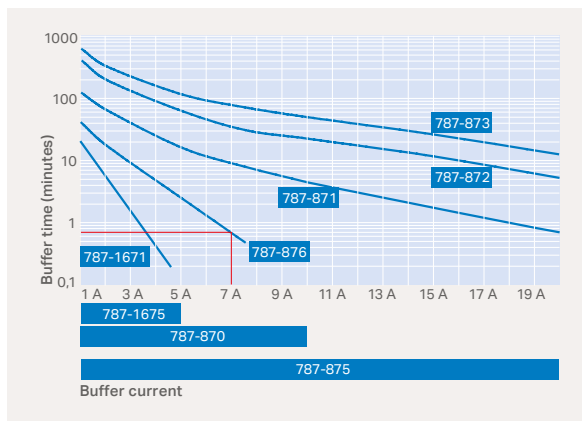

Different buffer times/currents can be achieved depending on the battery module selected. The example above shows a 7 A load current provided for approximately 30 seconds by a 787-870 UPS Charger/Controller (10 A) and 787-876 Battery Module.

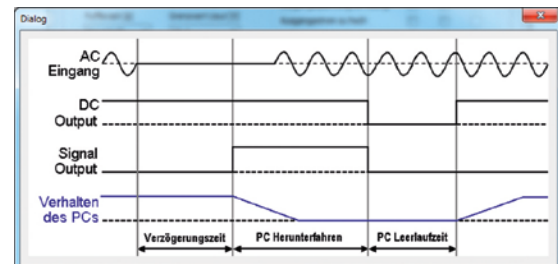

WAGO's UPS units can be conveniently configured using the free 759-870 Configuration Software. Values for the input voltage, battery data, output voltage and current, as well as error status are displayed in the software.

In addition to easily connecting to a notebook, the UPS units can be connected to the WAGO-I/O-SYSTEM or another controller system via RS-232 serial interface. Free function blocks allow easy monitoring of the UPS input and output data.


WAGO CAPACITIVE BUFFER MODULES

Short-Term Power Reserves
for Power Outages and Load
Variations




Decoupled Output

- Integrated diode
- Buffered and unbuffered loads can be decoupled

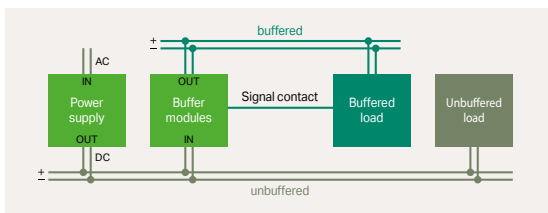

Parallel Connection Possible

- Multiple buffer modules can be parallel-connected to increase buffer time or load current

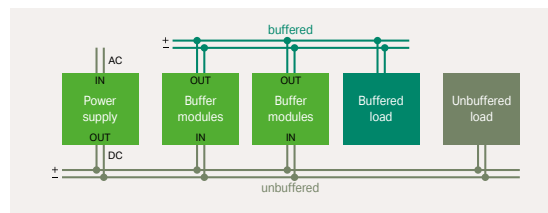

Signaling

- Three LEDs (green/yellow/red) indicate the current operating status
- A potential-free signal contact indicates the charge level




Maintenance-Free

- Regular replacement of the modules not necessary thanks to the long life of the integrated gold caps



Capacitive Buffer Modules 24 VDC

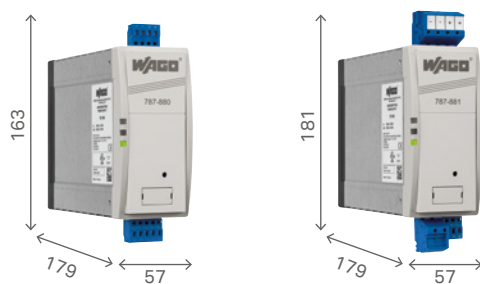

787-880
10 A/0.06 ... 7.2 s

787-881
20 A/0.17 ... 16.5 s


WAGO REDUNDANCY MODULES

Reliably Increasing
Power Supply
Availability




Highly Versatile

- Diode Redundancy Modules (787-783 and -785) can be used for 12 V, 15 V, 24 V, or 48 V power supplies thanks to their wide voltage range

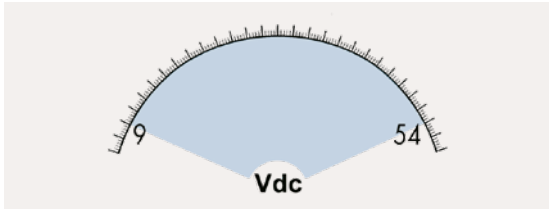


High Overload Capability

- Power diodes in each input path feature a high overload capacity and are also suitable for power supplies with TopBoost or PowerBoost
- Output currents up to 76 A thanks to parallel connection of the input paths

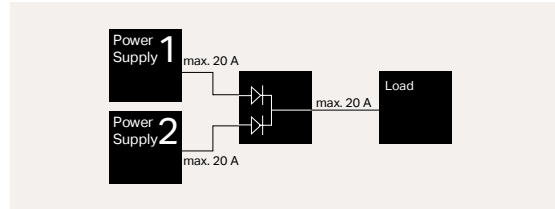

Signaling

- Three LEDs indicate the presence of an input or output voltage
- A potential-free signal contact optionally indicates a power supply failure on the input*
(only for 787-885 and -886)

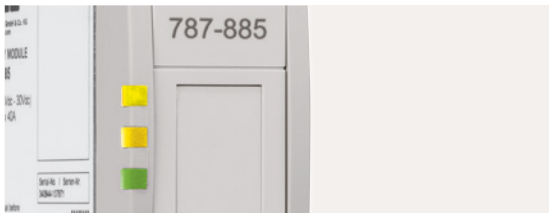

Low Power Dissipation

- Low power dissipation via active-switching MOSFETs*
- Includes MOSFET function monitoring*

*only for 787-1685



Redundancy Modules

Input: 2 x 24 VDC / 2 x 20 A



Input: 2 x 48 VDC / 2 x 20 A



787-885

24 VDC / 20/40 A (max.)

787-1685* (MOSFET Redundancy Module)

24 VDC / 40 A (max.)

787-886


48 VDC / 20/40 A (max.)

*.../0000-0070 is available with optional protective coating

Input: 2 x 9 ... 54 VDC / 2 x 12.5 A (max.)



Input: 2 x 9 ... 54 VDC / 2 x 40 A (max.)



787-783

9 ... 54 VDC / 12.5/25 A (max.)

787-785

9 ... 54 VDC / 40/76 A (max.)


WAGO ELECTRONIC CIRCUIT BREAKERS

Compact and Precise ECBs
for DC Circuits




Intuitive Status Indication

- Each output channel has backlit buttons for switching on/off, as well as status acknowledgment
- Integrated, multi-color LEDs indicate the operating status of each channel

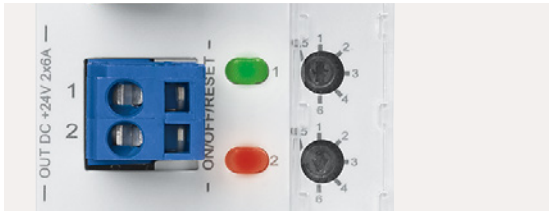

Communication 1.0


- Remote digital input S1 resets all tripped channels
- Digital output S3 transmits a simple group message indicating whether one of the channels was triggered by an overcurrent.
- Optional isolated signal contact 13/14 as group signal

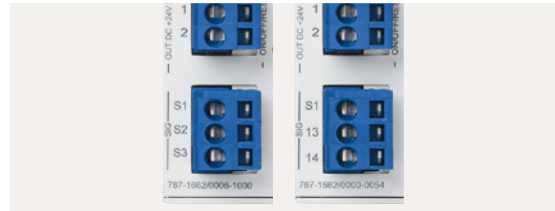

Trip Characteristics


- Reliable and precise disconnection in case of overcurrent or short circuit
- Nominal currents can be set separately for each channel in 1 A increments
- Tripping time can be configured in defined increments
- Optional, active short circuit current limitation to 1.7 times the nominal current prevents a voltage drop in other current paths

*Only for 787-166x/xxx-1xxx

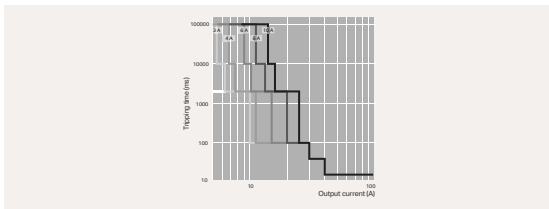


Communication 2.0

- Remote digital input S1 switches certain channels on and off via pulse sequence
- Digital output S2 transmits the current status (on/off/tripped/overcurrent) of each individual channel
- Optional transmission of input voltage and output/nominal current value for each channel

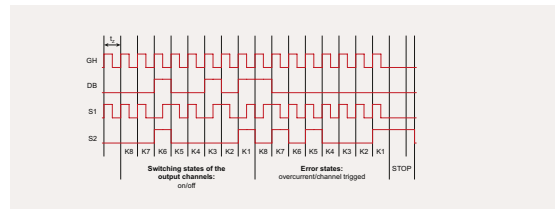

Rotary Switch

- Nominal current can be individually adjusted for each channel
- The setting is visible – even when no voltage is applied
- Transparent cover can be sealed and marked

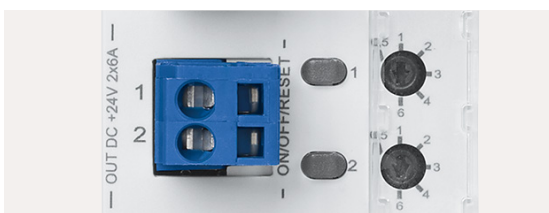

Communication 3.0


- IO-Link interface
- Read both the status and nominal current setting, as well as actual voltage/current values per channel
- Set the nominal current, switch on/off and reset individual channels



WAGO

ELECTRONIC CIRCUIT BREAKERS

Compact and Precise ECBs for DC Circuits

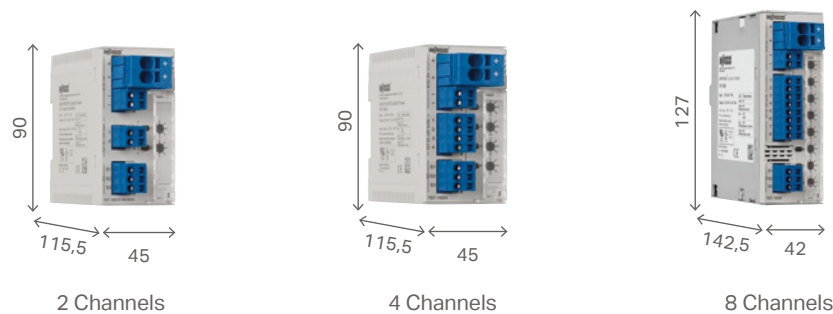

Nominal Voltage [V] DC	Number of Channels	Adjustable Nominal Current	Communi-cation	Active Current Limitation	Specialty Configuration	Item Number
24	2	2 ... 10	M			787-1662
		2 ... 10	P		■	787-1662/0000-0054
		3.8 LPS	M	■		787-1662/0004-1000
		0.5 ... 6	M	■		787-1662/0006-1000
		1 ... 6	M			787-1662/0106-0000
24	4	2 ... 10	M			787-1664
		2 ... 10	M		■	787-1664/0000-0004
		2 ... 10	P		■	787-1664/0000-0054
		1 ... 10	I			787-1664/0000-0080
		3.8 LPS	M	■		787-1664/0004-1000
		0.5 ... 6	M	■		787-1664/0006-1000
		1 ... 6	M			787-1664/0106-0000
		2 ... 12	M	■		787-1664/0212-1000
		0.5 ... 6	P	■	■	787-1664/0006-1054
24	8	2 ... 10	M			787-1668
		2 ... 10	M		■	787-1668/0000-0004
		2 ... 10	P		■	787-1668/0000-0054
		1 ... 10	I			787-1668/0000-0080
		0.5 ... 6	M	■		787-1668/0006-1000
		1 ... 6	M			787-1668/0106-0000
		0.5 ... 6	P	■	■	787-1668/0006-1054
12	4	2 ... 10	M			787-1664/0000-0100
48	4	2 ... 10	P			787-1662/0000-0250
		2 ... 10	M			787-1664/0000-0200
		2 ... 10	P			787-1664/0000-0250
	8	2 ... 10	M			787-1668/0000-0200
		2 ... 10	P			787-1668/0000-0250

S = Signal
P = Potential-free signal
I = IO-Link protocol
M = Manchester protocol

Further information on ECBs' communication options can be found on pages 44/45.




Model Code Key:

787-xx6a/bbcc-defg

Series	_____	_____	_____	_____	_____	_____	_____
Design	_____	_____	_____	_____	_____	_____	_____
ECB	_____	_____	_____	_____	_____	_____	_____
Number of Channels	_____	_____	_____	_____	_____	_____	_____
Lower nominal current (00: 0.5 A; 01: 1 A; 02: 2 A)	_____	_____	_____	_____	_____	_____	_____
Upper nominal current (04: 3.8 A; 06: 6 A; 08: 8 A; 12: 12 A)	_____	_____	_____	_____	_____	_____	_____
With (1) or without (0) active current limitation	_____	_____	_____	_____	_____	_____	_____
Nominal voltage (0: 24 VDC; 1: 12 VDC; 2: 48 VDC)	_____	_____	_____	_____	_____	_____	_____
With (5) or without (0) potential-free contact; (2) settable single-channel variant	_____	_____	_____	_____	_____	_____	_____
Configuration (0: standard; 4: with group message "tripped" and "switched off;" 5, 6: customer specification)	_____	_____	_____	_____	_____	_____	_____

WAGO ELECTRONIC CIRCUIT BREAKERS

Compact and Precise ECBs
for DC Circuits

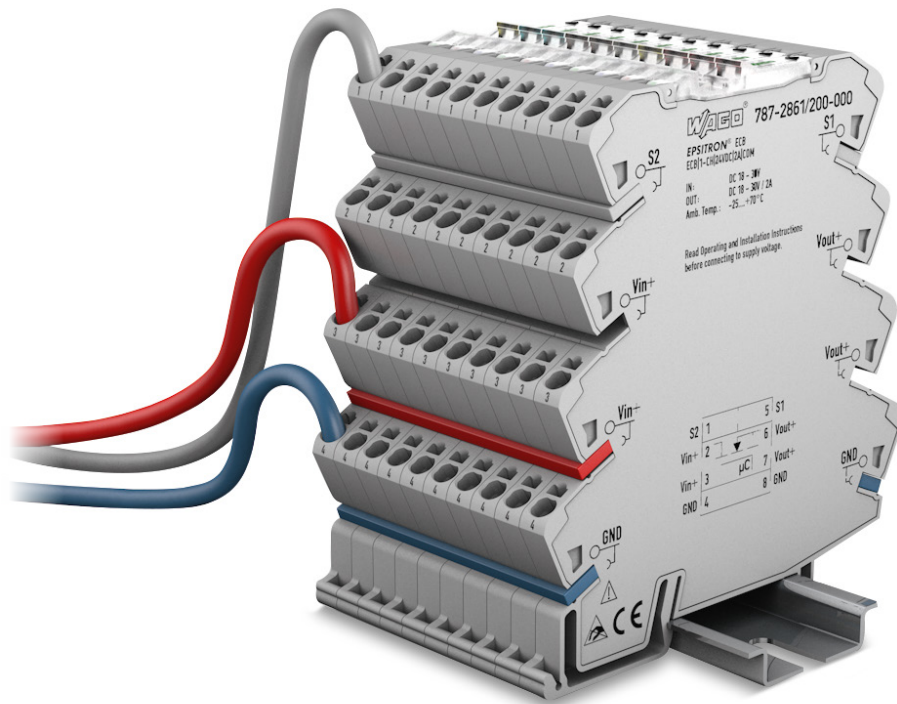


Intuitive Status Indication

- Integrated multi-color LEDs indicate the operating status of each channel
- Push/slide switch for switching on/off and acknowledgment




Trip Characteristics

- Reliable, fast and precise disconnection in case of overcurrent or short circuit
- High switch-on capacities > 50,000 µF

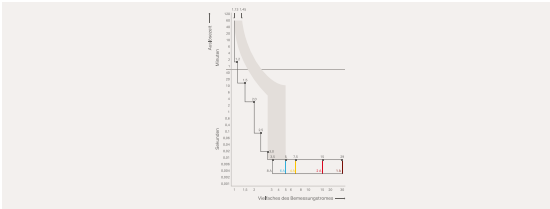


Easy Wiring

- Input potential up to 40 A via double connection
- Signal output can be commoned for up to 30 devices
- Total reset by commoning the signal inputs


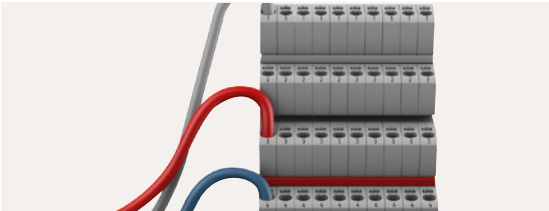






Versatile Configuration Options

- Optional nominal current setting
1 ... 8 A, in 1 A increments
- Seven different configuration options for the digital measurement output

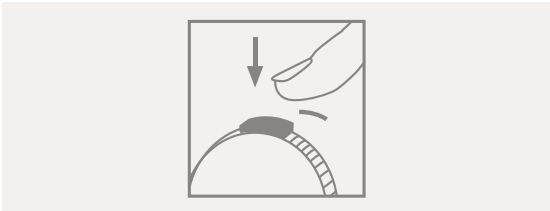

24 VDC – 1 Channel

Electronic Circuit Breaker (ECB)	Item Number	Nominal Current	Communication	Color Coding
	787-2861/0100-0000	1 A	S	
	787-2861/0200-0000	2 A	S	
	787-2861/0400-0000	4 A	S	
	787-2861/0600-0000	6 A	S	
	787-2861/0800-0000	8 A	S	
	787-2861/0108-0020	1 ... 8 A	S	


Additional information on ECBs' communication options can be found on pages 44/45.




© Nataliya Hora/Fotolia.com

SOLUTIONS

ECBs Prevent Accidental Restart

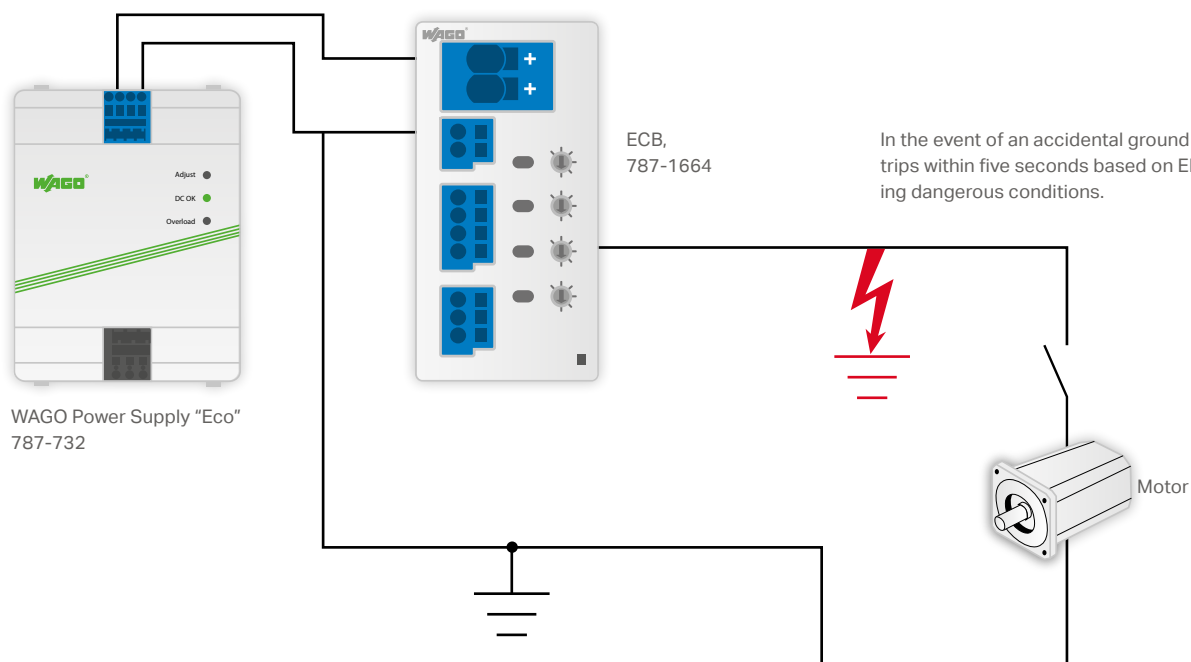


Power Supply Selection for ECBs with Active Current Limitation

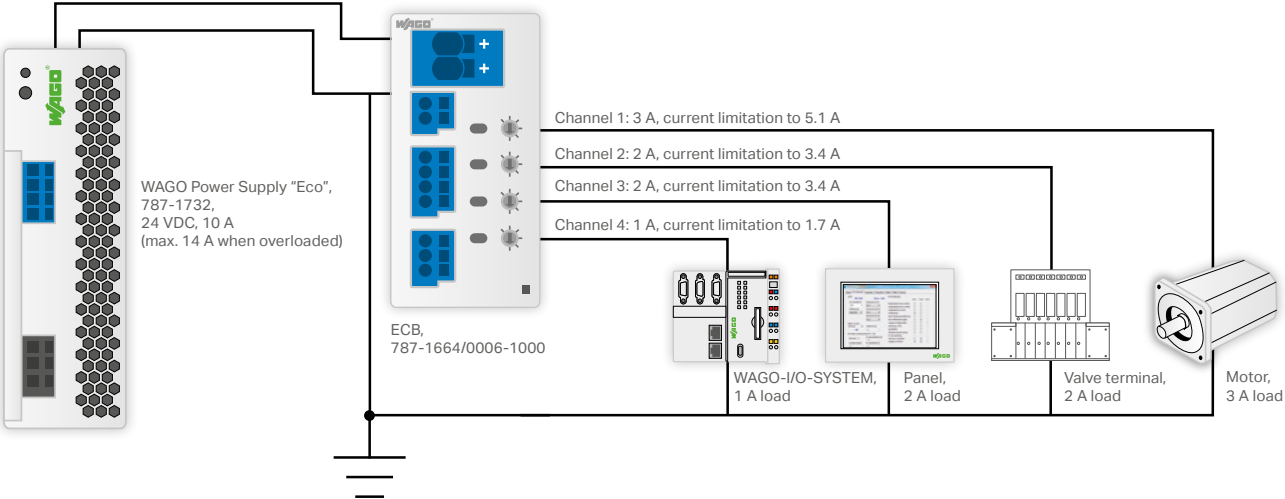

	Channel 1	Channel 2	Channel 3	Channel 3	Σ	Effects
Max. continuous current (no error)	3 A	2 A	2 A	1 A	8 A	<ul style="list-style-type: none">Normal operation
Max. continuous current (error: channel 1)	5.1 A	2 A	2 A	1 A	10.1 A	<ul style="list-style-type: none">Current on channel 1 is limited to 1.7 times the nominal currentImpedance of the error loop not significantNo voltage drop on channels 2, 3 and 4
Max. continuous current (error: all channels)	5.1 A	3.4 A	3.4 A	1.7 A	13.6 A	<ul style="list-style-type: none">Current per channel is limited to 1.7 times the nominal currentImpedance of the error loop not significantVoltage drop on all channels because power supply is overloadedCircuit breaker switched off due to undervoltage detection

Power Supply Selection for ECBs without Current Limitation

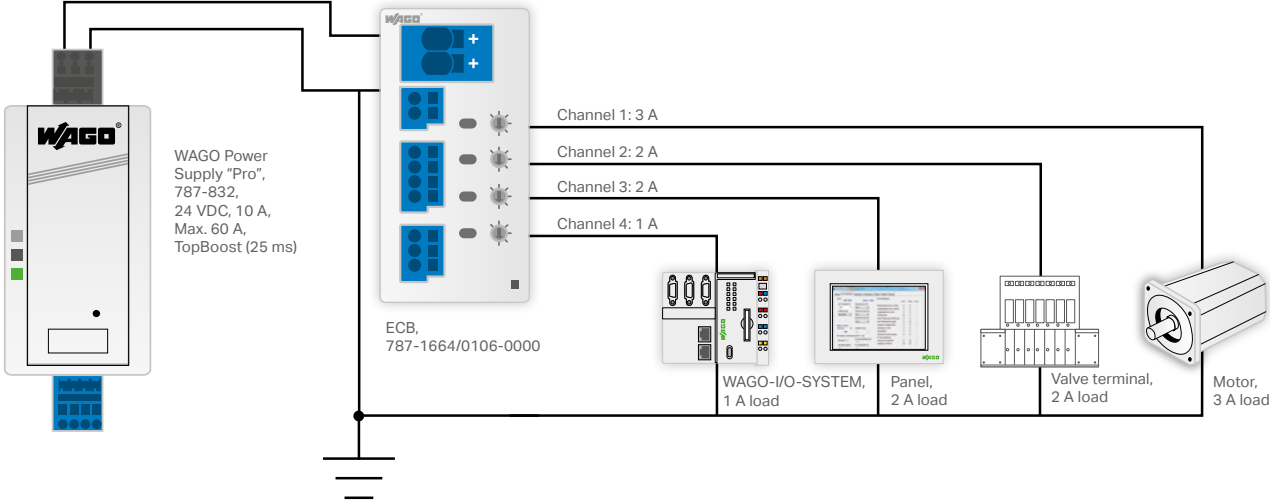


	Channel 1	Channel 2	Channel 3	Channel 4	Σ	Effects
Max. continuous current (no error)	3 A	2 A	2 A	1 A	8 A	<ul style="list-style-type: none">Normal operation
Max. continuous current (error: channel 1)	Max. 55 A available*	2 A	2 A	1 A	60 A (TopBoost)	<ul style="list-style-type: none">Depends on error loop impedanceShort voltage drop possible; trigger time according to characteristic
Max. continuous current (error: all channels)	Current values depend on error loop impedance				60 A (TopBoost)	<ul style="list-style-type: none">Current is limited by error loop impedanceVoltage drop on all channels very probable because power supply is overloaded

*(60 A-2 A-2 A-1 A)

COMMUNICATION


Electronic Circuit Breakers (ECBs)

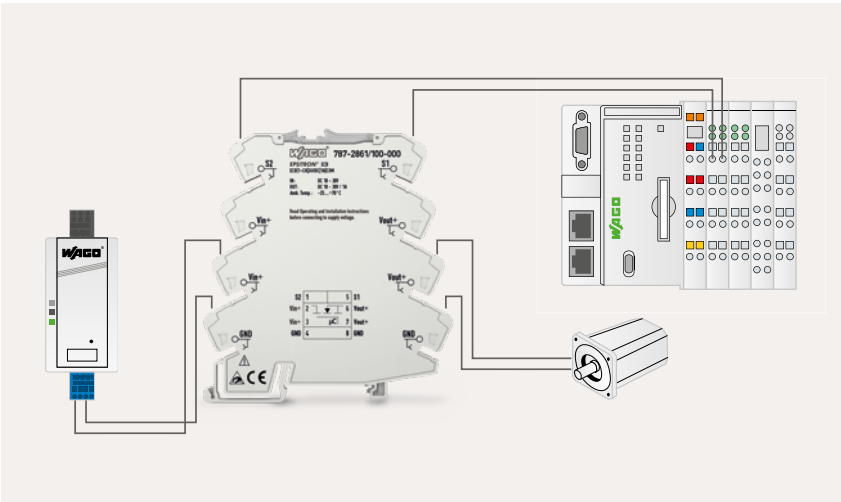

Communication 1.0 Digital Signaling (S/P)


ECBs can be reset via digital control signal. The 787-2861 ECB can also be switched on and off with this control signal.

A digital output signal indicates the status of the channel or the sum of the channels for 787-166x ECBs. For some devices, this signal is potential-free (P).

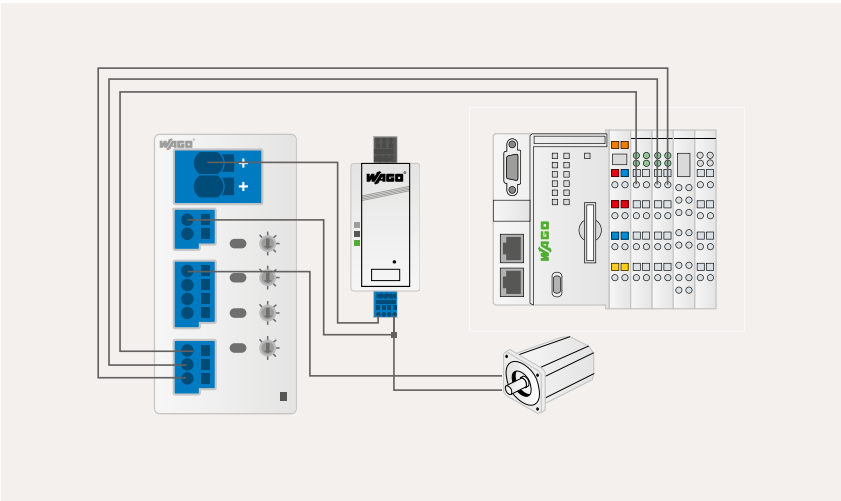

Communication 2.0 Manchester Protocol (M)

The PLC transmits a coded pulse pattern to control input S1. The ECB synchronizes itself automatically. The current status of all output channels is transmitted back simultaneously via signal output S2. The edge change is interpreted as high or low. Both the status and voltage/current values of each channel can be transmitted individually.

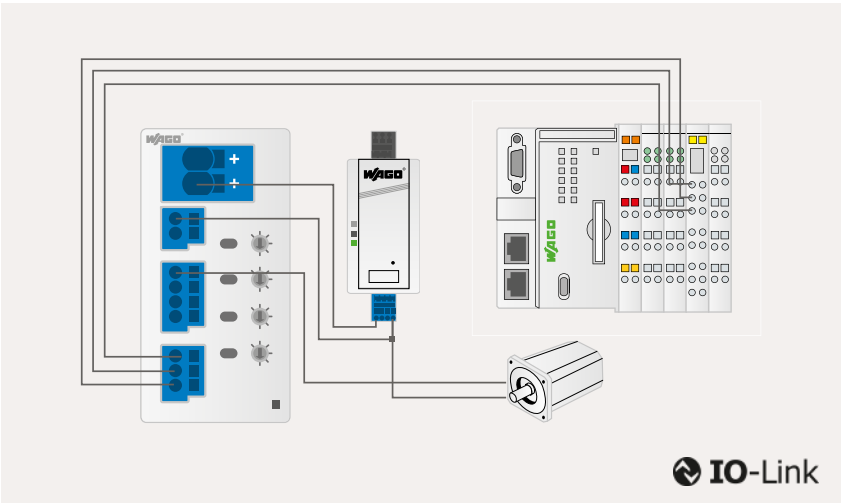

Communication 3.0 IO-Link (I)

Both the status and voltage/current values of each channel can be transmitted individually via IO-Link COM3 interface. The nominal output current can also be configured via this interface if the device's rotary switch is set accordingly.

The IO-Link cyclic communication is much faster than the Manchester protocol.

- S = Signal
- P = Potential-free signal
- I = IO-Link protocol
- M = Manchester protocol

Function blocks for ECB monitoring that use the WAGO-I/O-SYSTEM, or different control systems, are available for free.

WAGO’s ECBs have digital inputs and outputs that communicate via the Manchester protocol.


All channels can be diagnosed and switched remotely independently of each other.

Transmission of:


- State per channel
- Current output current
(only for 787-166x/xxxx-1xxx and 787-166x/xxxx-xx8x)
- Nominal current setting per channel
- Input voltage
- Power on/off and reset per channel
- Nominal current setting
(only for 787-166x/xxxx-xx8x)

Available Function Blocks:

- CODESYS
- Siemens S7/TIA-Portal
- Schneider
- Rockwell
- Mitsubishi (pending)

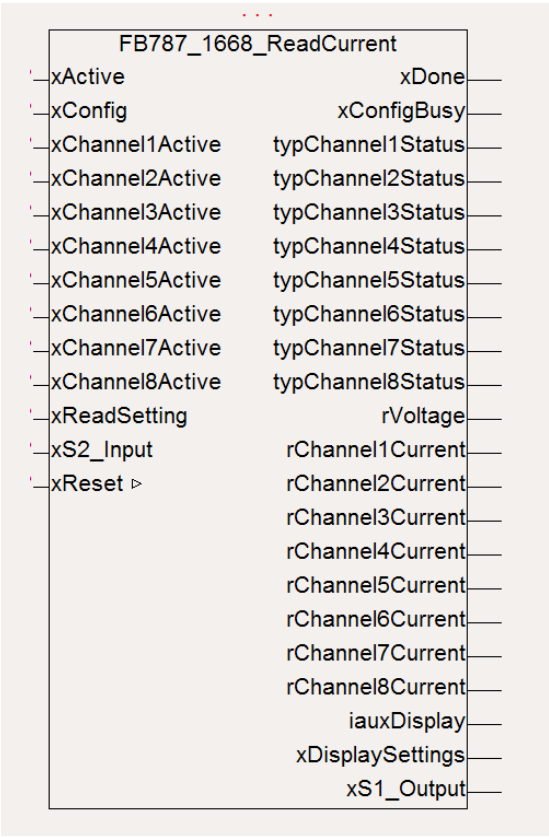


GLOSSARY

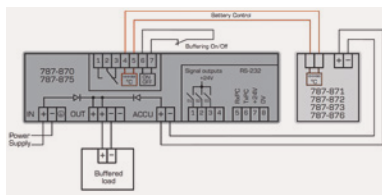

Battery Control

Battery control technology allows data exchange between intelligent battery modules, charger and controller.


In addition to temperature values, information on type and service life of the connected battery modules is also transmitted to the charger and controller.

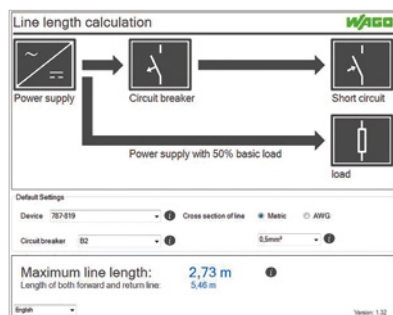

TopBoost

In order for high-speed magnetic circuit breakers to trip, currents that are significantly higher than the rated current are required for 10–12 milliseconds. Both Pro and Pro 2 Power Supplies deliver a multiple of their nominal current for a short time – the faulty circuit can be shut off within milliseconds during a short circuit. This increases the availability of the entire power supply and also serves

to fulfill EN 60204-1 for grounding faults in control circuits. Using the free line length calculator available from www.wago.com/epsitron, the designer or planner can check in advance the layout of the line protection based on cable lengths, cable cross section, characteristics of the protective device, and type of power supply.

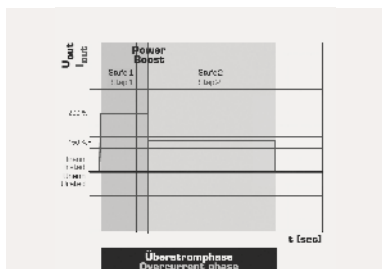


PowerBoost

During start-up or switching of capacitive loads (valve clusters, motors, etc.), there is an increased need for current. However, using conventional power supplies previously always required using a much larger power supply to avoid switching to overload operation or short circuit limitation.

For these cases, WAGO's Pro and Pro 2 Power Supplies offer power reserves


and provide significantly higher output current above the nominal current for a few seconds. The availability of the higher output power for a short time ensures reliable operation and eliminates the expensive oversizing of power supplies. This also saves space in the control cabinet and reduces power losses, while ensuring optimum efficiency.

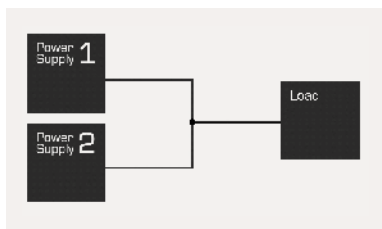

Parallel Connection of Power Supplies – for Extra Power

Most WAGO Power Supplies can be connected in parallel on the output side to provide extra power. To achieve load distribution that is as uniform as possible for parallel-connected devices, the output voltage without load must be set as precisely as possible to the same value. Star wiring using external rail-mount terminal blocks is required

to ensure the resistance levels for all power supplies are as equal as possible to the load. Do not connect the power supplies directly via their female connectors. Pro and Pro 2 Power Supplies with differing output power levels may also be connected in parallel. Otherwise, only connect power supplies of the same type in parallel.

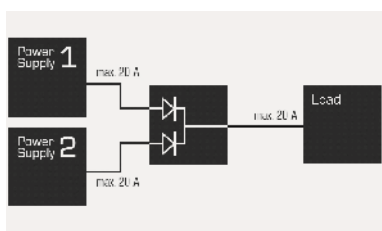

Parallel Connection of Power Supplies – for Increased Power Availability

Parallel connection using decoupling diodes in the respective current path can increase system availability and reliability. In normal operation, both units supply the load. If a power supply fails, the intact power supply becomes responsible for completely supplying the load.

Of course, the nominal current of each power supply must be higher than the maximum load current that occurs. The redundancy modules feature powerful decoupling diodes that reliably prevent reverse currents. The decoupling diodes ensure 100% redundancy, i.e., also for the rare case of an internal secondary short circuit in the power supply.

ACCESSORIES




RS-232 Communication Cable, 1.8 m long, 787-890

The communication cable is used for configuration and visualization via PC, notebook or PLC. It is suitable for all 787-8xx Series devices equipped with an RS-232 serial interface.

Connectors: 8-pole female connector (733-108) with strain relief (787-8xx module side), 9-pole D-sub female connector (PC/PLC side)


RS-232 Communication Cable, 1.8 m long (not pictured), 787-892

Similar to 787-890, but carries a 4-pole female connector (734-104) compatible with 787-1675

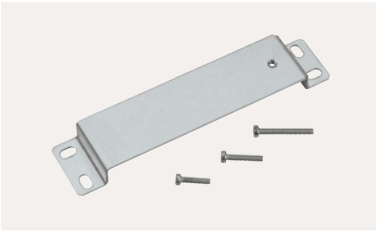

Wall-Mount Adapter (787-895) for screw mounting 787-8xx devices on a mounting plate or wall without a DIN-35 rail

The wall-mount adapter replaces the rail support of the 787-8xx device. The adapter is secured to the 787-8xx device via provided screws.

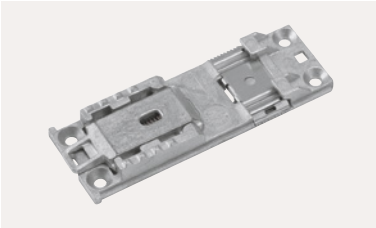

DIN-Rail Adapter (787-897) made of zinc die-cast for mounting 787-8xx devices to DIN-rail

Mounting the DIN-Rail Adapter (787-897) to the device is performed by pressing the adapter into the guide slots of the cooling element with a tool.

An extremely secure fit ensures reliable operation – even in environments subject to permanent vibrations.

The adapter can also be secured via 4 screws (not included) and thus serve as a universal DIN-rail adapter.



Operating tools with a partially insulated shaft, ideal for operating terminal blocks

210-719: Operating tool with a partially insulated shaft, type 1, blade 2.5 x 0.4 mm, suitable for 733 and 734 Series Female Connectors

210-720: Operating tool with a partially insulated shaft, type 2, blade 3.5 x 0.5 mm, suitable for 231, 236 and 721 Series Female Connectors

210-721: Operating tool with a partially insulated shaft, type 3, blade 5.5 x 0.8 mm, suitable for 831 Series Female Connectors

210-769: Phillips PH0 operating tool, type 1, PH0 blade, for setting the voltage of the WAGO Compact Power Supply, 787-10xx 787-17xx, 787-7xx Series

Allied Automation
800-214-0322
www.allied-automation.com

WAGO Kontakttechnik GmbH & Co. KG

Postfach 2880 · 32385 Minden
Hansastraße 27 · 32423 Minden
info@wago.com
www.wago.com

Headquarters	+49 571/ 887 - 0
Sales	+49 571/ 887 - 222
Orders	+49 571/ 887 - 44333
Fax	+49 571/ 887 - 8 44169

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

"Copyright – WAGO Kontakttechnik GmbH & Co. KG – All rights reserved. The content and structure of the WAGO websites, catalogs, videos and other WAGO media are subject to copyright. Distribution or modification of the contents of these pages and videos is prohibited. Furthermore, the content may neither be copied nor made available to third parties for commercial purposes. Also subject to copyright are the images and videos that were made available to WAGO Kontakttechnik GmbH & Co. KG by third parties."